


312973 - 312974 - 312971 - 312972 - 312969 - 312970

Max Power Radio remote control is designed to work with our entire range of tunnel and retractable thrusters. The remote control can also be used to operate additional onboard equipment such as windlasses, passerelles, cranes, etc.

- Supports up to 8 independently controlled channels
- Each receiver can switch four channels (12/24V 5A)
- Each transmitter can handle two receivers (8 channels)
- Digital recognition avoids accidental activation of other systems
- Available in 868Mhz (European conformity)
- Available in 915Mhz (US conformity)
- Transmitter power supply: 2 lithium batteries 3V (CR2430) included
- Receiver power supply: 12/24V DC
- Zero power consumption when in standby mode (transmitter)
- Easy to install and set-up, simple to use




## Receiver / outputs




Each receiver controls 4 isolated volt free contacts with a load switching capacity of up to 24V and 5A.

Each transmitter can handle 2 receivers which can be placed in two different locations.

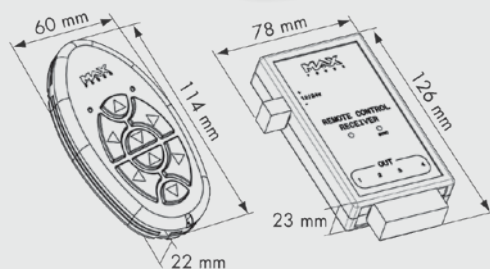


| Code                                 | 312973  | 312974                       | 312971                   | 312972                    | 312969                 | 312970                  |
|--------------------------------------|---|------------------------------|--------------------------|---------------------------|------------------------|-------------------------|
| Description                          | Transmitter & Receiver (EU)                     | Transmitter & Receiver (USA) | Additional Receiver (EU) | Additional Receiver (USA) | Spare Transmitter (EU) | Spare Transmitter (USA) |
| Frequency*                           | 868MHz  | 915MHz                       | 868MHz                   | 915MHz                    | 868MHz                 | 915MHz                  |
| Number of buttons (Transmitter)      | 8   | 8                            | -                        | -                         | 8                      | 8                       |
| Voltage                              | 12-24Vdc (receiver)                             |                              | 12-24Vdc                 |                           | 2pcs of 3V size CR2430 |                         |
| Operative temperature                | - 10:+60  | - 10:+60                     | - 10:+60                 | - 10:+60                  | - 10:+60               | - 10:+60                |
| IP protection rated (transmitter)    | 67  | 67                           | -                        | -                         | 67                     | 67                      |
| Max contacts amperage(A), (Receiver) | 2   | 2                            | 2                        | 2                         | 2                      | 2                       |
| Weight(gr)                           | 310   | 310                          | 100                      | 100                       | 85                     | 85                      |
| Dimension(mm)                        | 114x60x22 (transmitter)<br>126x78x23 (receiver) |                              | 126x78x23                |                           | 114x60x22              |                         |


Designed to work with our entire range of tunnel and retractable thrusters the Remote Control can be used to control a bow and stern thruster at the same time.




Bow thruster alone



Stern thruster alone



Bow & Stern thrusters



Bow & Stern thrusters

\* 868 MHz is the authorised frequency for Europe and Australia. 915 MHz is the authorised frequency for Canada and the USA. Retail sales and use of non-authorised frequency transmitters and receivers is prohibited. For all other countries please consult the local regulation in force.