

PS2-Y ABC

ANAFGROUP

Stored pressure

Powder

2 kg

Temperature ranges

-30°C + 60°C



On request



BODY

ALUMINUM

Seamless, deep drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin

VALVE

ACETALYC RESIN

Squeeze grip lever operated valve with acetal resin body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

STANDARD PACK

4 pieces cardboard box, robust and suitable for transport. Each piece is shrink-wrapped

WEIGHT Kg

2,66

DIMENSION mm

108 Ø x 378

Accessories

- Standard
- On request

BRACKET



Polypropylene bracket



Metal bracket



Plastic band

HOSE RINGS & PROTECTIVE BASE

ADDITIONAL FEATURES



One color screen printing



Two-color PVC label

PACKAGING



One-piece white cardboard box




One-piece colored cardboard box

Technical data

FIRE RATINGS	13A 89B C	
CHARGE	2 kg ± 3%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 75 micron
	Corrosion resistance	480 h minimum according to ISO 9227:1990
EXTINGUISHING AGENT	ANAF - A33 ABC dry powder	
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 12 s
PRESSURE	Operating pressure at 20 °C	9 bar
	Operating pressure at 60 °C	11 bar
	Operating pressure at -30 °C	6 bar
DIMENSIONS	Overall height	379 mm
	Bottle outer diameter	108 mm
WEIGHT	Empty / Charged	0,65 kg / 2,65 kg
PACKING SPECIFICATIONS	Standard packing	4 pieces cardboard box
	Carton size (B x L x H)	240 x 240 x 400 mm
	Weight per carton	10,9 kg
	Pallet	60 cartons
	Pallet size (B x L x H)	800 x 1200 x 1780 mm
	Pallet volume	1,70 m ³
	Weight per pallet (net/gross)	655 kg / 675 kg

© REPRODUCTION IS FORBIDDEN

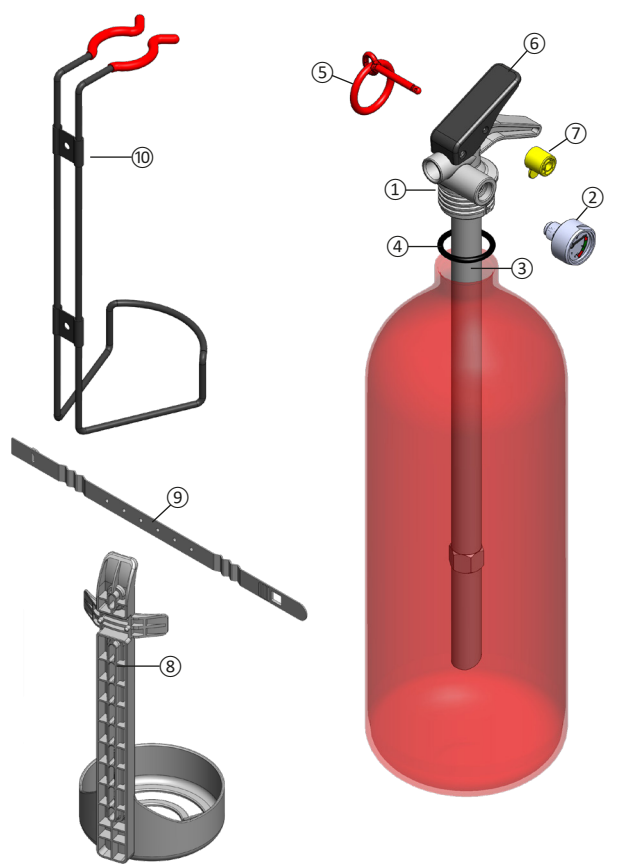

Nr.	Description	Code
1	Valve with black lever and o-ring, without gauge and safety pin	00.800B.8505.01
2	Pressure gauge	00.652A.4900.10
3	Dip tube	00.800B.5900.00
4	O-ring for the valve	00.652A.5010.00
5	Safety pin	00.652A.5020.00
6	Black lever	00.652A.6050.00
7	Seal Yellow	00.652A.5030.VE
8	Bracket	00.682B.2500.00
9	Bracket strip	00.682B.2510.00
10	Steel Wire Bracket	00.800B.2961.00

33.682B.01.05.2021

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu